Guangdong Kangju Medicine Science Co.,Ltd

Imported by: KINDSAFE B.V
Diepenhorstlaan 2V 2288 EW Rijiswijk Netherlands
E-mail:yanghu8421@gmail.com

COMPANY PROFILE

Guangdong Kangju Medicine Science Company is a Chinese modern high-tech company, It products and sales protective masks, medical devices, etc.
Kangju Medicine is a manufacturer of medical devices in Guangdong Province, and it is also a support material production enterprise that approved by the department of COVID-19 epidemic prevention of the government in Guangdong Province. And Kangju Medicine is one of the company in medical white list enterprise of the Ministry of Commerce.
Kangju Medicine has 10000 square meters of 100000 grade GMP production workshop, more than 50 mask production lines, ethylene oxide sterilization workshop and 20000 square meters of modern storage.
The company has a professional medical industrial production, operation, management and new product R & D team. In Kangju Medicine, we can also see a high standard, high specification, modern testing and experimental center.
The company mainly produces kn95 masks, disposable medical protective masks and other medical equipment products. Kangju Medicine Science Company strictly adheres to national standard quality assurance system and all products are approved by Poland PRS pn-en149 + a1:2010 CE certification and other international certification authorities. All products are sold well at home and abroad.

广东康居医药科技有限公司
TEL：86-754-86592222
陈小姐：15816656063
陈经理：13542817549
http://www.gdkjyy.com/
地址：广东省汕头市潮南区两英镇古厝社区龙岭山坡洋
Manufacturer name: Guangdong Kangju Medicine Science Co.,Ltd.
TEL: 0754-86592222
Production Address: Longling Industrial Area,Liangying Town, Chaonan District,Shantou City,GuangDong Province，China

EQUIPMENT TECHNOLOGY

FULLY AUTOMATIC KN95 PROTECTIVE MASK WORKSHOP

WE ARE COMMITTED TO TO PROVIDE CUSTOMERS WITH HIGH QUALITY PRODUCTS AND SERVICES.

PRODUCTION PROCESS FLOW CHART

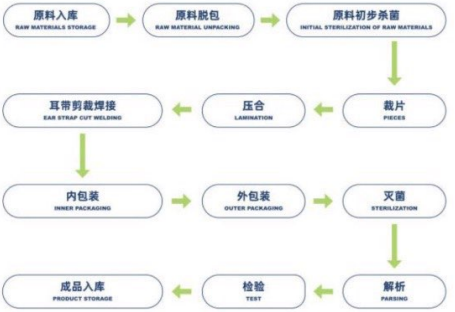

MELT BLOWN CLOTH WORKSHOP

KN95 SHEET-PUNCHING WORKSHOP

AUTOMATIC FORMING WORKSHOP

TESTING CENTER

广东康居医药科技有限公司

Guangdong Kangju Medicine Science Co.,Ltd

Business License

统一社会信用代码
91440514574491515 6

营 业 执 照

（副 本）（副本号:1-1）

名　　称　广东康居医药科技有限公司

类　　型　有限责任公司（自然人投资或控股）

法定代表人　陈荣洪

经 营 范 围　[illegible]

注 册 资 本　人民币陆仟捌佰万元

成 立 日 期　2011年05月12日

营 业 期 限　长期

住　　所　汕头市潮南区两英镇古厝社区龙岭山坡洋

登 记 机 关

2020年 4 月 [illegible] 日

国家企业信用信息公示系统网址：http://www.gsxt.gov.cn

国家市场监督管理总局监制

Production Permission License

医疗器械生产许可证

许可证编号：粤食药监械生产许 20203909 号

企业名称：广东康居医药科技有限公司

法定代表人：陈荣洪

企业负责人：陈荣洪

住　　所：汕头市潮南区两英镇古厝社区龙岭山坡洋

有效期限：至 2025 年 08 月 11 日

生产地址：汕头市潮南区两英镇古厝社区龙岭山坡洋

生产范围：见医疗器械生产产品登记表

发证部门：广东省药品监督管理局

发证日期：2020 年 08 月 12 日

国家食品药品监督管理总局制

www.cccmhpie.org.cn

Double list of medical + non-medical masks

www.cccmhpie.org.cn

取得国外标准认证或注册的医疗物资生产企业清单

动态更新：2020年8月4日下载

Name List of Medical Devices and Supplies Companies with Certification/Authorization from other Countries

序号	生产企业	统一社会信用代码	国外注册认证情况
一、医用口罩 Medical Face Masks			
[illegible]	[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]	[illegible]
2013	广东康居医药科技有限公司 Guangdong Kangju Medicine Science Co.,Ltd.	91440514574491515 6	欧盟CE
[illegible]	[illegible]	[illegible]	[illegible]

Medical Face Mask

中国医药保健品进出口商会

服务产业链 · 助力国际化

English 登陆 | 注册

开具不可抗力相关事实性证明

取得国外认证和注册企业查询

首页 关于商会 · 新闻中心 · 行业服务 · 权威发布 · 商会会员 · 企业风采 · 会员之家 · 加入商会

取得国外标准认证或注册的医疗物资和非医用口罩生产企业检索

清除 检索

企业名称（中文）	企业名称（英文）	产品类别	产品名称/型号	统一社会信用代码	国外注册认证情况
广东康居医药科技有限公司	Guangdong Kangju Medicine Science Co.,Ltd.	医用口罩	Disposable Medical Surgical mask(non-sterile) Disposable medical mask(non-sterile)	91440514574491515 6	欧盟CE
广东康居医药科技有限公司	Guangdong Kangju Medicine Science Co.Ltd.	非医用口罩	KJ-L	91440514574491515 6	欧盟CE

Non-Medical Face Mask

Qualification Documents

CERTYFIKAT BADANIA TYPU UE (MODUŁ B)
EU TYPE-EXAMINATION CERTIFICATE (MODULE B)

2022-08-25

Product information

Qualification Documents

Certificate CN21/42128

Guangdong Kangju Medicine Science Co.,Ltd

Longling Industrial Area, Liangying Town, Chaonan District, Shantou City, Guangdong Province, P.R. China

Regulation (EU) 2016/425

Module D

Manufacture of FFP2 Protective Respirators (Note: all products marked CE0598 must have a valid EU Type Examination Certificates issued under Module B or a valid EC type examination certificate issued under Article 10 of the PPE Directive 89/686/EEC.)

This certificate is valid from 8 February 2021 until 7 February 2024 and remains valid subject to satisfactory surveillance audits. Re certification audit due before 12 January 2024 Issue 1. Certified since 8 February 2021

Authorised by

SGS FIMKO OY, Notified Body 0598

FINAS

Guangdong Kangju Medicine Science Co.,Ltd

Regulation (EU) 2016/425

Module B, EU type-examination

SGS FIMKO OY, Notified Body 0598

FINAS

Guangdong Kangju Medicine Science Co.,Ltd

Regulation (EU) 2016/425

Module B, EU type-examination

Issue 1

KANGJU (logo) KJ-KN2009 particle filtering half mask, consisting of a white four layer (polypropylene/ polypropylene / polypropylene / polypropylene) disposable face mask, with nose clip and nylon/spandex ear loop.

It is certified that the manufacturer's technical file and the above mentioned PPE have been assessed and found to meet the applicable Essential Health and Safety Requirements in Annex II of Regulation (EU) 2016/425 Personal Protective Equipment

The following have been applied:

EN 149:2001+A1:2009 (Respiratory protective devices - filtering half masks to protect against particles) device classification: FFP2 NR.

This certificate is issued on the strict condition that appropriate checks on manufactured PPE, as detailed in Article 19 (c) of the Regulation are implemented and maintained while the model is in production

Certification is based on technical file reference: KJ-KN2009, dated: 2020/9/8.

SGS Reference Number UK/CRS 242058.

FINAS

SGS CERTIFICATE

Qualification Documents

KANGJU KINDSAFE®

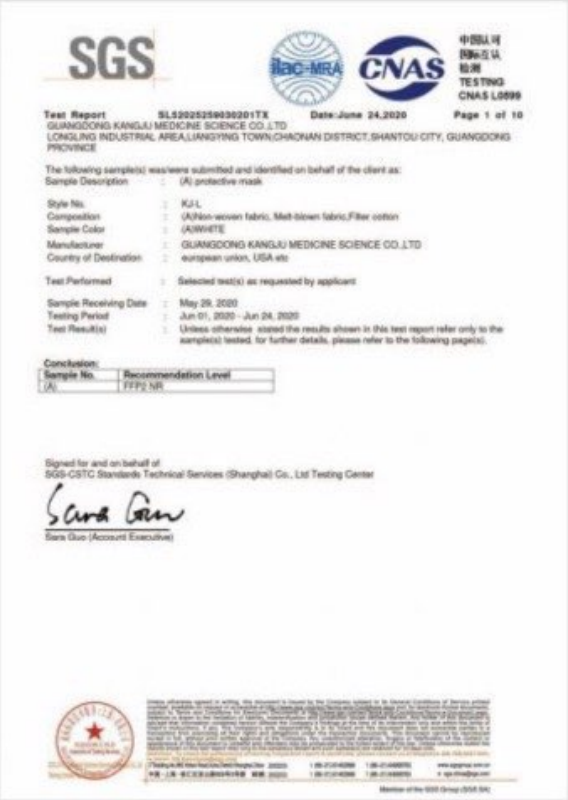

SGS

ilac-MRA CNAS 中国认可 国际互认 检测 TESTING CNAS L0599

Test Report SL52025259030201TX Date:June 24,2020 Page 1 of 10

GUANGDONG KANGJU MEDICINE SCIENCE CO.,LTD
LONGLING INDUSTRIAL AREA,LIANGYING TOWN,CHAONAN DISTRICT,SHANTOU CITY, GUANGDONG PROVINCE

The following sample(s) was/were submitted and identified on behalf of the client as:

Sample Description	:	(A) protective mask
Style No.	:	KJ-L
Composition	:	(A)Non-woven fabric, Melt-blown fabric,Filter cotton
Sample Color	:	(A)WHITE
Manufacturer	:	GUANGDONG KANGJU MEDICINE SCIENCE CO.,LTD
Country of Destination	:	european union, USA etc
Test Performed	:	Selected test(s) as requested by applicant
Sample Receiving Date	:	May 29, 2020
Testing Period	:	Jun 01, 2020 - Jun 24, 2020
Test Result(s)	:	Unless otherwise stated the results shown in this test report refer only to the sample(s) tested, for further details, please refer to the following page(s).

Conclusion:

Sample No.	Recommendation Level
(A)	FFP2 NR

Signed for and on behalf of
SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd Testing Center

Sara Guo (Account Executive)

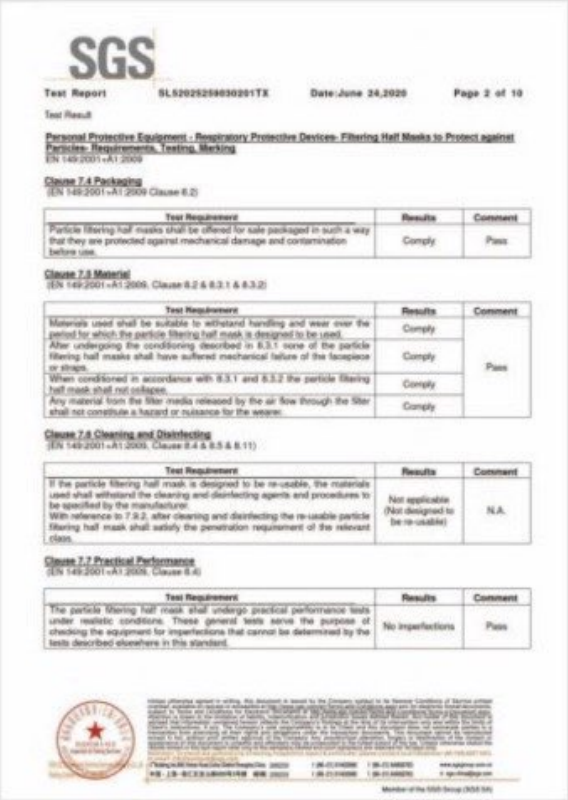

SGS

Test Report SL52025259030201TX Date:June 24,2020 Page 2 of 10

Test Result

Personal Protective Equipment - Respiratory Protective Devices- Filtering Half Masks to Protect against Particles- Requirements, Testing, Marking
EN 149:2001+A1:2009

Clause 7.4 Packaging
(EN 149:2001+A1:2009 Clause 8.2)

Test Requirement	Results	Comment
Particle filtering half masks shall be offered for sale packaged in such a way that they are protected against mechanical damage and contamination before use.	Comply	Pass

Clause 7.5 Material
(EN 149:2001+A1:2009, Clause 8.2 & 8.3.1 & 8.3.2)

Test Requirement	Results	Comment
Materials used shall be suitable to withstand handling and wear over the period for which the particle filtering half mask is designed to be used.	Comply	Pass
After undergoing the conditioning described in 8.3.1 none of the particle filtering half masks shall have suffered mechanical failure of the facepiece or straps.	Comply	
When conditioned in accordance with 8.3.1 and 8.3.2 the particle filtering half mask shall not collapse.	Comply	
Any material from the filter media released by the air flow through the filter shall not constitute a hazard or nuisance for the wearer.	Comply	

Clause 7.6 Cleaning and Disinfecting
(EN 149:2001+A1:2009, Clause 8.4 & 8.5 & 8.11)

Test Requirement	Results	Comment
If the particle filtering half mask is designed to be re-usable, the materials used shall withstand the cleaning and disinfecting agents and procedures to be specified by the manufacturer. With reference to 7.9.2, after cleaning and disinfecting the re-usable particle filtering half mask shall satisfy the penetration requirement of the relevant class.	Not applicable (Not designed to be re-usable)	N.A.

Clause 7.7 Practical Performance
(EN 149:2001+A1:2009, Clause 8.4)

Test Requirement	Results	Comment
The particle filtering half mask shall undergo practical performance tests under realistic conditions. These general tests serve the purpose of checking the equipment for imperfections that cannot be determined by the tests described elsewhere in this standard.	No imperfections	Pass

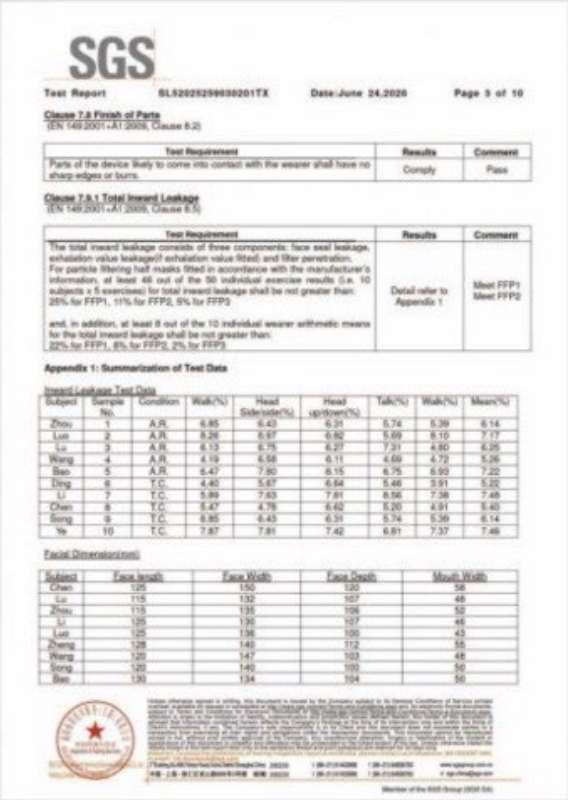

SGS

Test Report SL52025259030201TX Date:June 24,2020 Page 3 of 10

Clause 7.8 Finish of Parts
(EN 149:2001+A1:2009, Clause 8.2)

Test Requirement	Results	Comment
Parts of the device likely to come into contact with the wearer shall have no sharp edges or burrs.	Comply	Pass

Clause 7.9.1 Total Inward Leakage
(EN 149:2001+A1:2009, Clause 8.5)

Test Requirement	Results	Comment
The total inward leakage consists of three components: face seal leakage, exhalation valve leakage(if exhalation valve fitted) and filter penetration. For particle filtering half masks fitted in accordance with the manufacturer's information, at least 46 out of the 50 individual exercise results (i.e. 10 subjects x 5 exercises) for total inward leakage shall be not greater than: 25% for FFP1, 11% for FFP2, 5% for FFP3 and, in addition, at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than: 22% for FFP1, 8% for FFP2, 2% for FFP3	Detail refer to Appendix 1	Meet FFP1 Meet FFP2

Appendix 1: Summarization of Test Data

Inward Leakage Test Data

Subject	Sample No.	Condition	Walk(%)	Head Side/side(%)	Head up/down(%)	Talk(%)	Walk(%)	Mean(%)
Zhou	1	A.R.	6.85	6.43	6.31	5.74	5.39	6.14
Luo	2	A.R.	8.28	6.97	6.82	5.69	8.10	7.17
Lu	3	A.R.	6.13	6.75	6.27	7.31	4.80	6.25
Wang	4	A.R.	4.19	4.58	6.11	4.69	4.72	5.26
Bao	5	A.R.	6.47	7.80	8.15	6.75	6.93	7.22
Ding	6	T.C.	4.40	5.67	6.64	5.46	3.91	5.22
Li	7	T.C.	5.89	7.63	7.81	8.56	7.38	7.46
Chen	8	T.C.	5.47	4.78	6.62	5.20	4.91	5.40
Song	9	T.C.	6.85	6.43	6.31	5.74	5.39	6.14
Ye	10	T.C.	7.87	7.81	7.42	6.81	7.37	7.46

Facial Dimension(mm)

Subject	Face length	Face Width	Face Depth	Mouth Width
Chen	125	150	120	58
Lu	115	132	107	48
Zhou	115	135	106	52
Li	125	130	107	46
Luo	125	136	100	43
Zheng	128	140	112	55
Wang	120	147	103	48
Song	120	140	100	50
Bao	130	134	104	50

SGS TEST REPORT

Qualification Documents

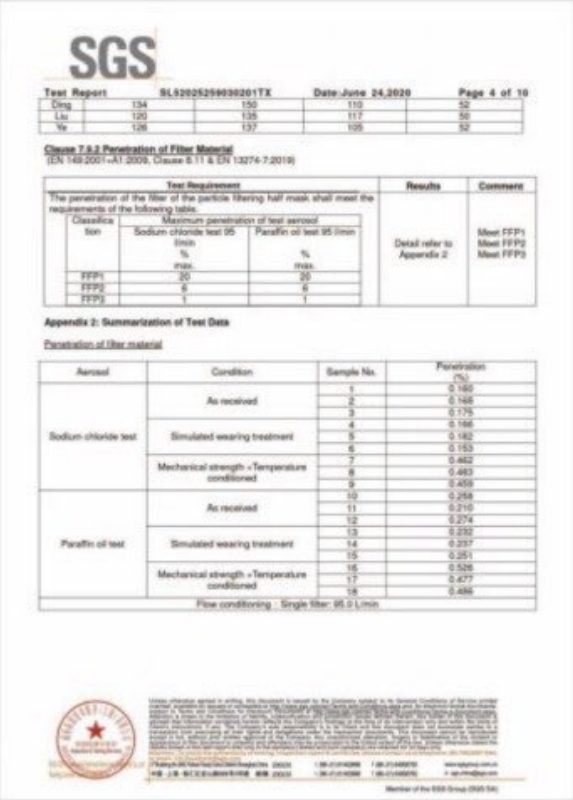

SGS

Test Report SL52025259030201TX Date:June 24,2020 Page 4 of 10

Ding	134	150	110	52
Liu	120	135	117	50
Ye	126	137	105	52

Clause 7.9.2 Penetration of Filter Material
(EN 149:2001+A1:2009, Clause 8.11 & EN 13274-7:2019)

Test Requirement	Results	Comment
The penetration of the filter of the particle filtering half mask shall meet the requirements of the following table.	Detail refer to Appendix 2	Meet FFP1 Meet FFP2 Meet FFP3

Classification	Maximum penetration of test aerosol	
	Sodium chloride test 95 l/min % max.	Paraffin oil test 95 l/min % max.
FFP1	20	20
FFP2	6	6
FFP3	1	1

Appendix 2: Summarization of Test Data

Penetration of filter material

Aerosol	Condition	Sample No.	Penetration (%)
Sodium chloride test	As received	1	0.160
		2	0.166
		3	0.175
	Simulated wearing treatment	4	0.166
		5	0.182
		6	0.153
	Mechanical strength +Temperature conditioned	7	0.462
		8	0.463
		9	0.459
Paraffin oil test	As received	10	0.258
		11	0.210
		12	0.274
	Simulated wearing treatment	13	0.232
		14	0.237
		15	0.251
	Mechanical strength +Temperature conditioned	16	0.526
		17	0.477
		18	0.486
Flow conditioning : Single filter: 95.0 L/min			

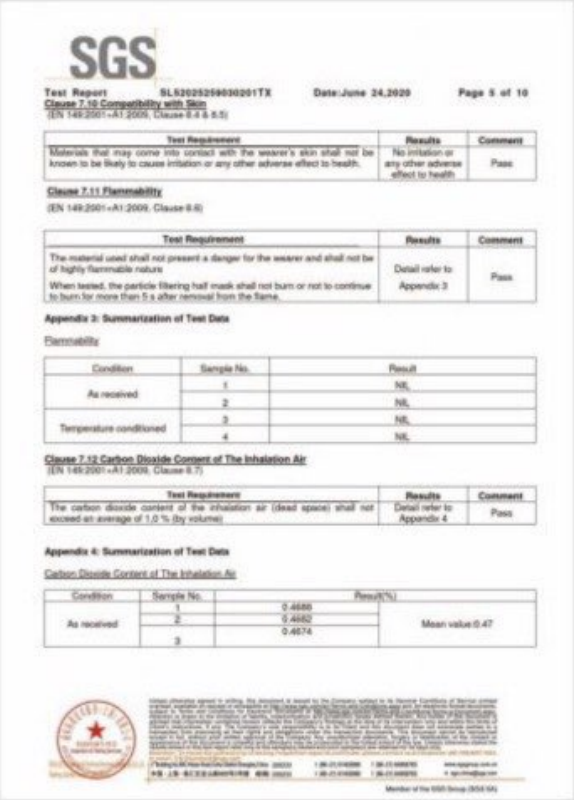

SGS

Test Report SL52025259030201TX Date:June 24,2020 Page 5 of 10

Clause 7.10 Compatibility with Skin
(EN 149:2001+A1:2009, Clause 8.4 & 8.5)

Test Requirement	Results	Comment
Materials that may come into contact with the wearer's skin shall not be known to be likely to cause irritation or any other adverse effect to health.	No irritation or any other adverse effect to health	Pass

Clause 7.11 Flammability
(EN 149:2001+A1:2009, Clause 8.6)

Test Requirement	Results	Comment
The material used shall not present a danger for the wearer and shall not be of highly flammable nature When tested, the particle filtering half mask shall not burn or not to continue to burn for more than 5 s after removal from the flame.	Detail refer to Appendix 3	Pass

Appendix 3: Summarization of Test Data

Flammability

Condition	Sample No.	Result
As received	1	NIL
	2	NIL
Temperature conditioned	3	NIL
	4	NIL

Clause 7.12 Carbon Dioxide Content of The Inhalation Air
(EN 149:2001+A1:2009, Clause 8.7)

Test Requirement	Results	Comment
The carbon dioxide content of the inhalation air (dead space) shall not exceed an average of 1.0 % (by volume)	Detail refer to Appendix 4	Pass

Appendix 4: Summarization of Test Data

Carbon Dioxide Content of The Inhalation Air

Condition	Sample No.	Result(%)	
As received	1	0.4686	Mean value:0.47
	2	0.4682	
	3	0.4674	

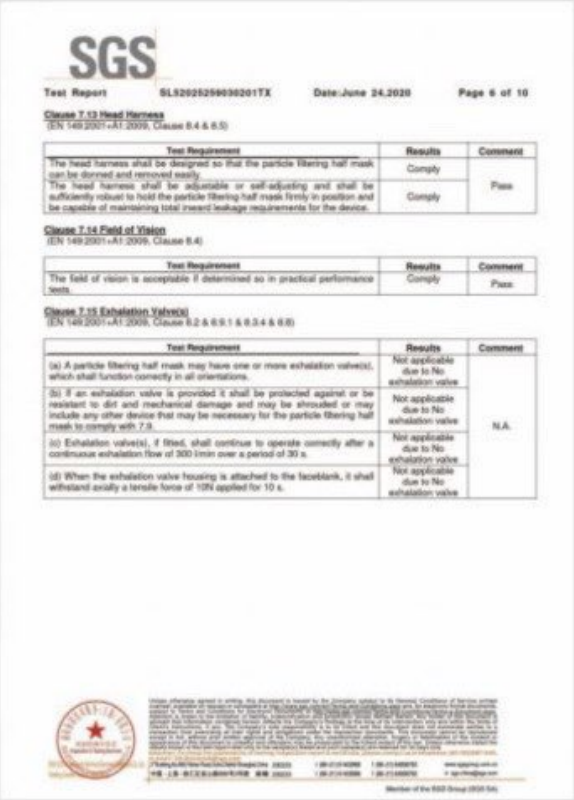

SGS

Test Report SL52025259030201TX Date:June 24,2020 Page 6 of 10

Clause 7.13 Head Harness
(EN 149:2001+A1:2009, Clause 8.4 & 8.5)

Test Requirement	Results	Comment
The head harness shall be designed so that the particle filtering half mask can be donned and removed easily.	Comply	Pass
The head harness shall be adjustable or self-adjusting and shall be sufficiently robust to hold the particle filtering half mask firmly in position and be capable of maintaining total inward leakage requirements for the device.	Comply	

Clause 7.14 Field of Vision
(EN 149:2001+A1:2009, Clause 8.4)

Test Requirement	Results	Comment
The field of vision is acceptable if determined so in practical performance tests.	Comply	Pass

Clause 7.15 Exhalation Valve(s)
(EN 149:2001+A1:2009, Clause 8.2 & 8.9.1 & 8.3.4 & 8.8)

Test Requirement	Results	Comment
(a) A particle filtering half mask may have one or more exhalation valve(s), which shall function correctly in all orientations.	Not applicable due to No exhalation valve	N.A.
(b) If an exhalation valve is provided it shall be protected against or be resistant to dirt and mechanical damage and may be shrouded or may include any other device that may be necessary for the particle filtering half mask to comply with 7.9.	Not applicable due to No exhalation valve	
(c) Exhalation valve(s), if fitted, shall continue to operate correctly after a continuous exhalation flow of 300 l/min over a period of 30 s.	Not applicable due to No exhalation valve	
(d) When the exhalation valve housing is attached to the faceblank, it shall withstand axially a tensile force of 10N applied for 10 s.	Not applicable due to No exhalation valve	

SGS TEST REPORT

Qualification Documents



SGS

Test Report SL5202529090201TS Date:June 24,2020 Page 7 of 10

Clause 7.10 Breathing Resistance
(YY 1042/GB/T-2626-2006, Clause 6.5)

Test Requirement				Results	Comment
The ventilation of the filter of the particle filtering half mask shall meet the requirements of the following table:				Detail refer to Appendix II	Meet FFP1 Meet FFP2 Meet FFP3
Classification	Minimum permitted ventilation (l/min)				
	Inhalation		Exhalation		
	30 l/min	95 l/min	160 l/min		
FFP1	210	210	210		
FFP2	210	210	210		
FFP3	210	210	210		

Appendix II: Summarization of Test Data.

Breathing resistance (mbar)

	Flow rate(l/min)	7.5	30	95	160	7.5	30	95	160	7.5	30	95	160	7.5	30	95	160
As received	Inhalation	90	206	240	243	240	243	243	243	240	243	243	243	240	243	243	243
		80	208	248	248	248	247	248	248	247	247	248	248	248	248	248	248
	Exhalation	160	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Simulated wearing moisture	Flow rate(l/min)	7.5	30	95	160	7.5	30	95	160	7.5	30	95	160	7.5	30	95	160
	Inhalation	90	206	243	243	240	243	243	243	240	243	243	243	240	243	243	243
		80	208	248	248	248	247	248	248	247	247	248	248	248	248	248	248
	Exhalation	160	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Temperature conditioned	Flow rate(l/min)	7.5	30	95	160	7.5	30	95	160	7.5	30	95	160	7.5	30	95	160
	Inhalation	90	206	243	243	240	243	243	243	240	243	243	243	240	243	243	243
		80	208	248	248	248	247	248	248	247	247	248	248	248	248	248	248
	Exhalation	160	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

A: facing directly upward; B: facing vertically upwards; C: facing vertically downwards; D: lying on the left side; E: lying on the right side



SGS

Test Report SL5202529090201TS Date:June 24,2020 Page 8 of 10

Clause 7.12 Dimension
(YY 1042/GB/T-2626-2006, Clause 6.9 & 6.10)

Test Requirement	Results	Comment
Clause 7.12.2 Breathing connection (YY 1042/GB/T-2626-2006, Clause 6.9) Breathing connection shall not exceed: After staging the inhalation resistance shall not exceed: The exhalation resistance shall not exceed 3 mbar at 160 L/min continuous flow Clause 7.12.3 Exhalation valve Injection particle filtering half masks: After staging the inhalation and exhalation resistances shall not exceed: The exhalation resistance shall not exceed 6 mbar at 95 L/min continuous flow Clause 7.12.4 Formation of filter material All types (calmed and calcinated) of particle filtering half masks claimed to meet the clogging requirement shall also meet the requirements: Classification: FFP1; Maximum penetration of test aerosol: Sodium chloride test (%) max.: 20; Paraffin oil test (%) max.: 6 FFP2: 6; 2 FFP3: 2; 0.5	Optional for single shift device only Optional for single shift device only	N.A.

Clause 7.16 Demountable Parts
(YY 1042/GB/T-2626-2006, Clause 6.12)

Test Requirement	Results	Comment
All demountable parts of filter shall be readily connected and secured where possible by hand	No demountable parts	N.A.

Test	Unexploding
Total inward leakage	5.0%
Penetration of filter material	4.8%
Carbon dioxide content of the inhalation air	3.9%
Breathing resistance (95L/min)	5.0%
Breathing resistance (95L/min)	4.9%
Breathing resistance (160L/min)	4.3%

SGS

Test Report SL5202529090201TS Date:June 24,2020 Page 9 of 10

Sample Photo

SGS

Test Report SL5202529090201TS Date:June 24,2020 Page 10 of 10

"End of Report"

SGS TEST REPORT

Filtering Half Mask (FFP2 NR)

产品编号 REF	面罩类型 TYPE	标准 STANDARD
KJ-L	foldable with ear 1oop	EN 149: 2001 +AI: 2009

FEATURES

- CE mark. CE
- Single use.
- Foldable design. Adjustable nose clip, elastic ear loop
- Non-toxic and non-irritating material.
- 4 or 5 layers protection: high particle and bacteria filtration efficiency.
- Prevent bacteria, dust, pollen, airborne chemical particulate, smoke and mist.

Filtering Half Mask (FFP2 NR)

产品编号 REF	面罩类型 TYPE	标准 STANDARD
KJ-L	foldable with ear 1oop	EN 149: 2001 +AI: 2009

FEATURES

- CE mark. CE
- Single use.
- Foldable design. Adjustable nose clip, elastic ear loop
- Non-toxic and non-irritating material.
- 4 or 5 layers protection: high particle and bacteria filtration efficiency.
- Prevent bacteria, dust, pollen, airborne chemical particulate, smoke and mist.

Inhalt: 6 Masken

XS

广东康居医药科技有限公司
TEL：86-754-86592222
陈小姐：15816656063
陈经理：13542817549
http://www.gdkjyy.com/
地址：广东省汕头市潮南区两英镇古厝社区龙岭山坡洋
Manufacturer name: Guangdong Kangju Medicine Science Co.,Ltd.
TEL: 0754-86592222
Production Address: Longling Industrial Area,Liangying Town,
Chaonan District,Shantou City,GuangDong Province，China

PROFESSIONAL

Manufacturer of Medical Face Mask
and Personal Protective Equipment (PPE)

KANGJU
KINDSAFE
FFP2 NR
KJ-L
FFP2 NR
PARTICLE FILTERING
HALF MASK
CE 0598
Inhalt: 1 Masken
NL
DE
Gebruiksaanwijzing
Gebrauchsanleitung
Waarschuwing
Sicherheitshinweis

FR
EN
Mode d'emploi
Attention
Manufacture: Guangdong Kangju Medicine Science Co.,Ltd
Production Address: Longling Industrial Area,Liangying Town, Chaonan District, Shantou City, Guangdong Province China.
TEL: 0754-86592222
Importiert durch: KINDSAFE B.V.
Diepenhorstlaan 2V 2288 EW Rijswijk Netherlands
E-mail:yanghu8421@gmail.com
Designed in The Netherlands - Made in China
8 720299 270664

KANGJU
FFP2 NR
KJ-L
EN149:2001+A1:2009
CE0598

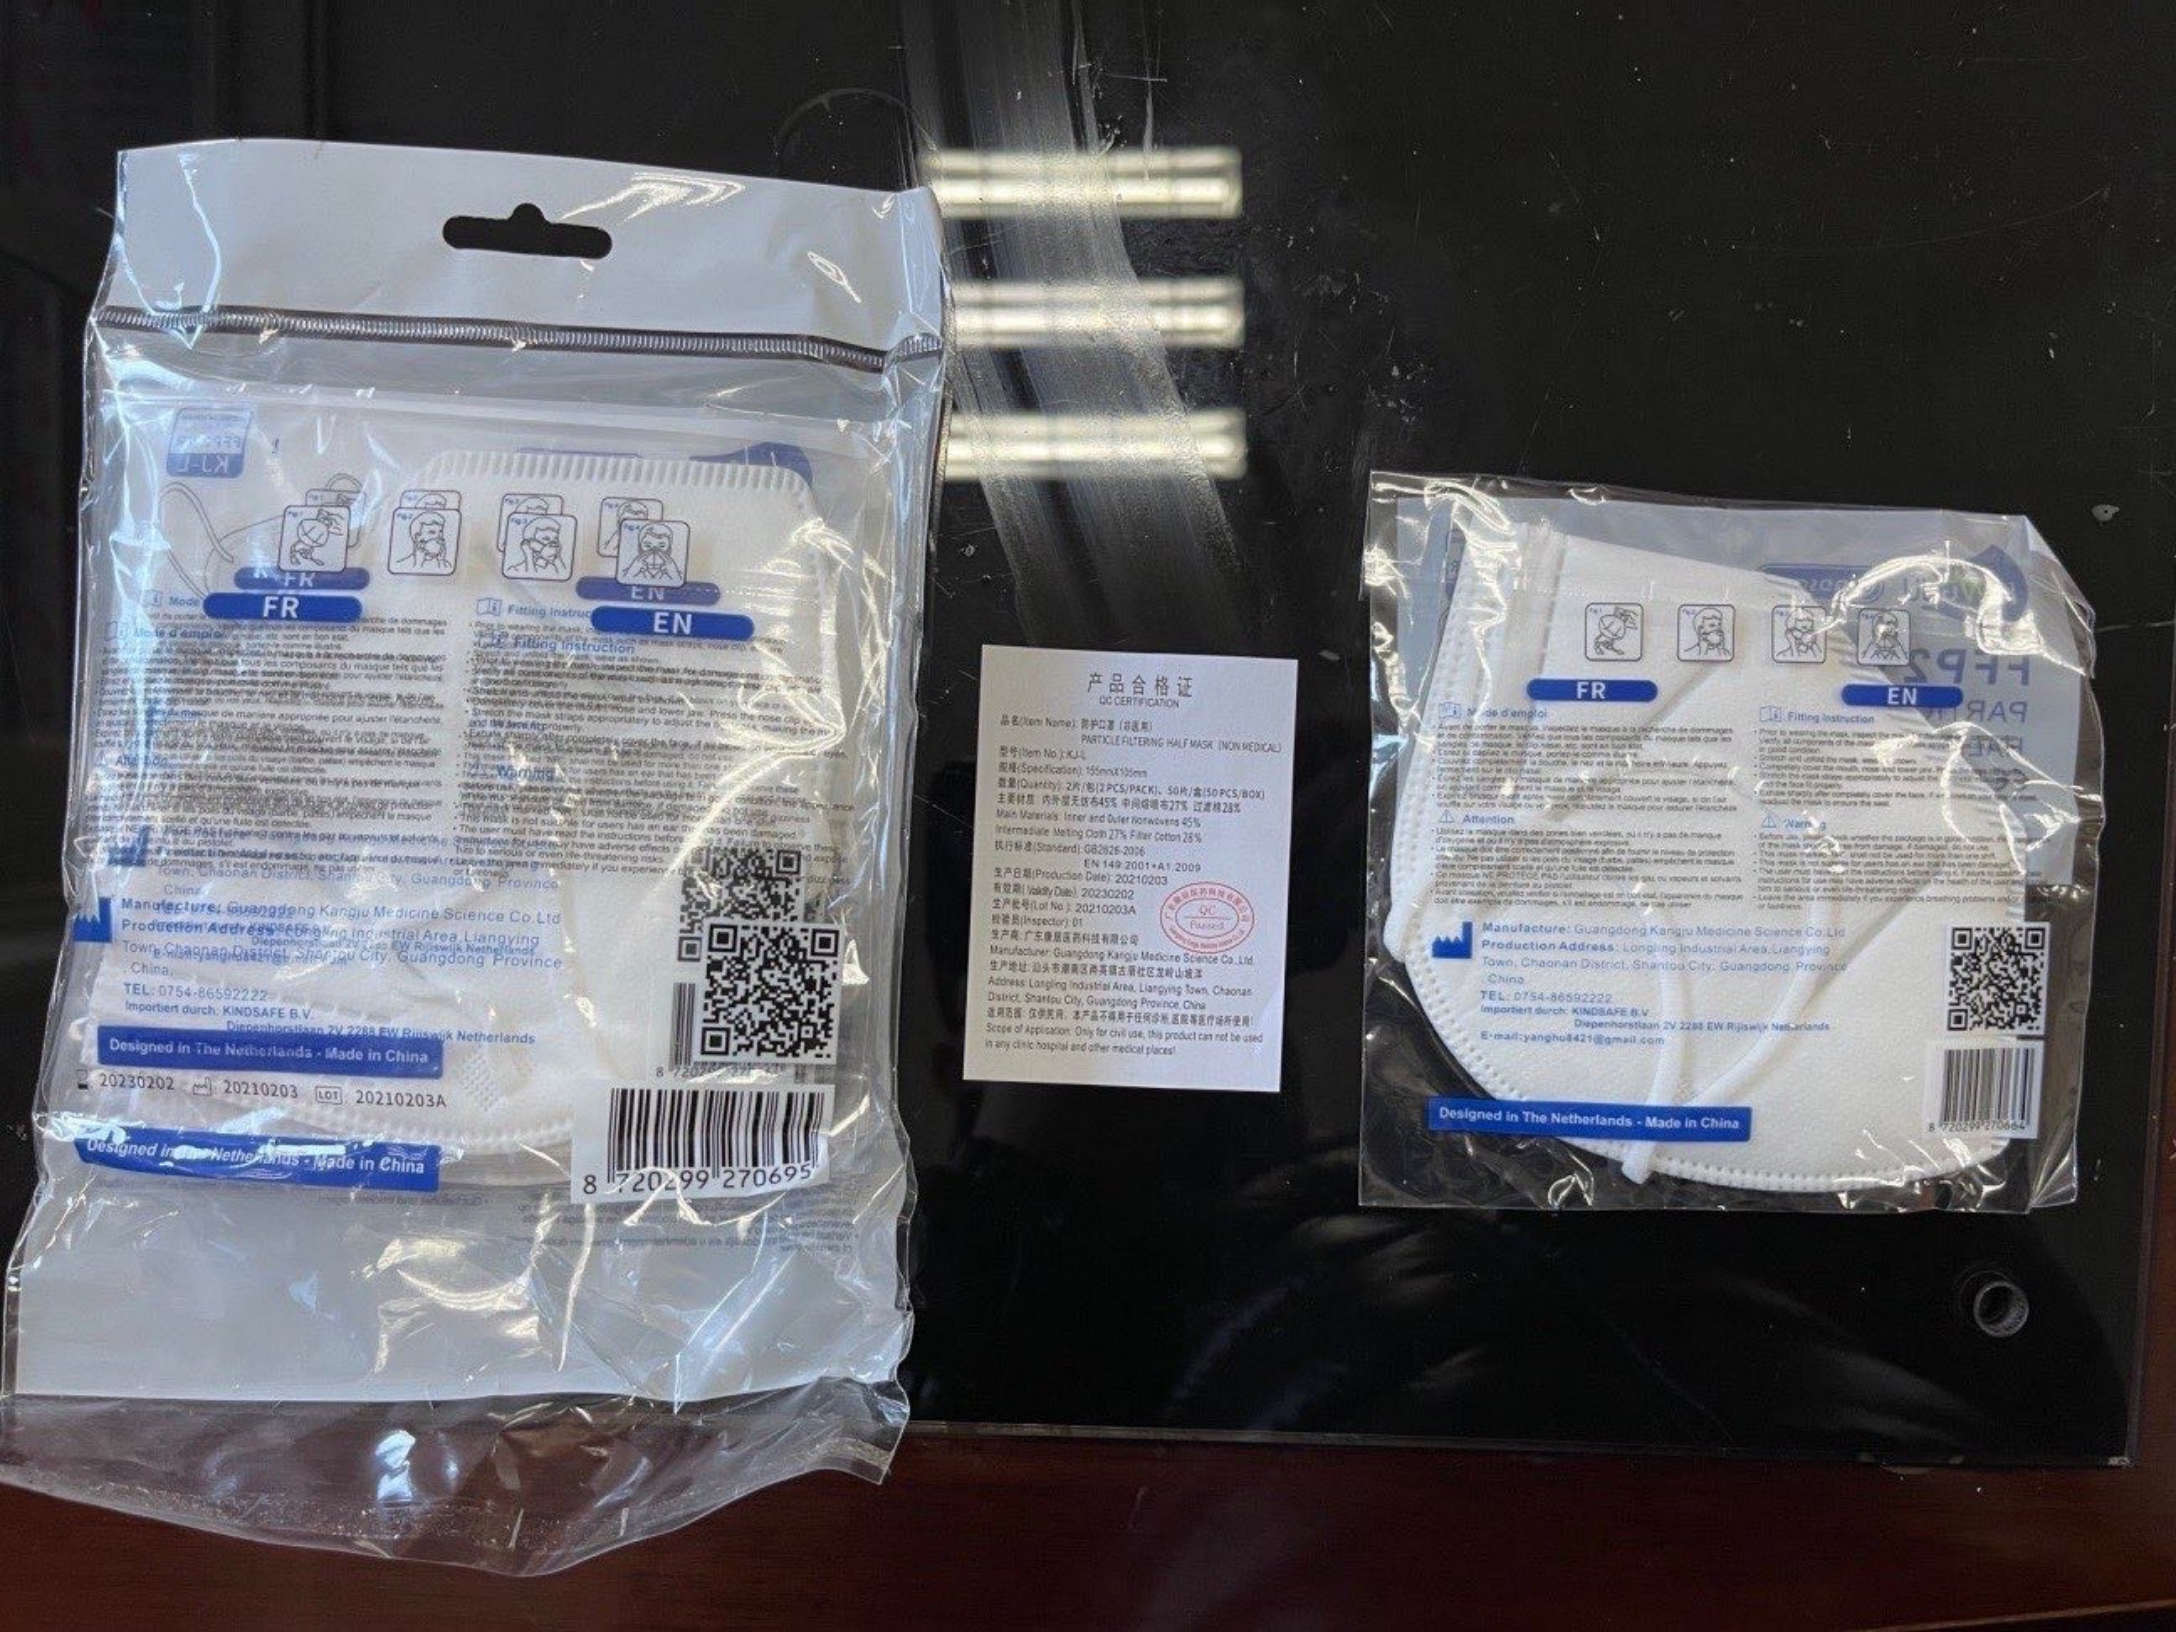
FR
EN
Mode d'emploi
Fitting Instruction
Attention
Warning
Manufacture: Guangdong Kangju Medicine Science Co.,Ltd
Production Address: Longling Industrial Area, Liangying Town, Chaonan District, Shantou City, Guangdong Province China
TEL: 0754-86592222
Importiert durch: KINDSAFE B.V.
Diepenhorstlaan 2V 2288 EW Rijswijk Netherlands
E-mail: yanghu8421@gmail.com
Designed in The Netherlands - Made in China
20230202
20210203
LOT 20210203A
8 720299 270695
产品合格证
QC CERTIFICATION
品名(Item Name): 防护口罩（非医用）
PARTICLE FILTERING HALF MASK (NON MEDICAL)
型号(Item No.): KJ-L
规格(Specification): 155mmX106mm
数量(Quantity): 2片/包(2 PCS/PACK)、50片/盒(50 PCS/BOX)
主要材质 内外层无纺布45% 中间熔喷布27% 过滤棉28%
Main Materials: Inner and Outer Nonwovens 45%
Intermadiate Melting Cloth 27% Filter Cotton 28%
执行标准(Standard): GB2626-2006
EN 149:2001+A1:2009
生产日期(Production Date): 20210203
有效期(Validity Date): 20230202
生产批号(Lot No.): 20210203A
检验员(Inspector): 01
生产商: 广东康居医药科技有限公司
Manufacturer: Guangdong Kangju Medicine Science Co.,Ltd
Address: Longling Industrial Area, Liangying Town, Chaonan District, Shantou City, Guangdong Province, China
Scope of Application: Only for civil use, this product can not be used in any clinic hospital and other medical places!
QC
Passed

KANGJU
KINDSAFE®
PARTIKELFILTERNDE HALBMASKE
FFP2 NR
KJ-L
FFP2 NR
PARTICLE FILTERING
HALF MASK
CE 0598
KANGJU
FFP2 NR
KJ-L
EN149:2001+A1:2009
CE 0598
Inhalt: 6 Masken
NL
DE
Gebruiksaanwijzing
controleer het masker op beschadigingen
Kijk alle componenten na, zoals de maskerbanden, neusclip
goede conditie zijn.
masker uit, draag het zoals het voorbeeld.
Druk de neusclip aan.
zodat het masker het gezicht goed
gezicht volledig hebt bedekt, als er lucht op uw
het masker opnieuw af
Gebrauchsanleitung
• Überprüfen Sie die Atemschutzmaske vor dem Tragen auf Beschädigungen und Verunreinigungen
• Dehnen Sie die Maske und legen Sie je eine Schlaufe um jedes Ohr, die Nasenklammer muss dabei auf Nasenhöhe sein
• Bedecken Sie Mund, Nase und Unterkiefer vollständig und drücken Sie die Nasenklammer fest
• Straffen Sie die Ohrschlaufen entsprechend, um die Maske an Ihr Gesicht anzupassen
• Atmen Sie nun stark aus nachdem Sie das Gesicht vollständig bedeckt haben. Wenn Luft seitlich aus Ihrer Maske entweicht, stellen Sie die Maske neu ein.
Sicherheitshinweis
• Überprüfen Sie die Verpackung auf Beschädigungen
• Verwenden Sie die Maske unmittelbar nach Öffnung der Verpackung
• Nur zur einmaligen Verwendung geeignet (NR)
• Entsorgen Sie die Maske, wenn Ihnen das Atmen schwerer fällt
• Entsorgen Sie die gebrauchte Maske gemäß den geltenden Vorschriften
• Gut belüftet und trocken lagern

10:30

5G

7,878.528

1,200

1,200

LGAI Technological Center, S.A. (APPLUS)
Campus UAB – Ronda de la Font del Carme s/n
08193 Bellaterra (Barcelona)
T +34 93 567 20 00
www.appluslaboratories.com

CERTIFICADO DE EXAMEN UE DE TIPO
EU-TYPE EXAMINATION CERTIFICATE

No. 0598

ORGANISMO NOTIFICADO Nº *NOTIFIED BODY NUMBER*	**0370 - LGAI TECHNOLOGICAL CENTER (APPLUS)**
SOLICITANTE / FABRICANTE *APPLICANT / MANUFACTURER*	**Shenzhen CLAB Technology Co.,Ltd.** No.87 Guangshen Rd,Xin'an St 11 District,Bao'an District,Shenzhen
PLANTA DE PRODUCCIÓN *PRODUCTION SITE*	**Shenzhen CLAB Technology Co.,Ltd.** No.87 Guangshen Rd,Xin'an St 11 District,Bao'an District,Shenzhen
REGLAMENTO DE APLICACIÓN PARA DAR LA CONFORMIDAD / *APPLICABLE REGULATION TO GIVE CONFORMITY:* **REGLAMENTO (UE) 2016/425 SOBRE LOS EQUIPOS DE PROTECCIÓN INDIVIDUAL** *REGULATION (EU) 2016/425 PERSONAL PROTECTIVE EQUIPMENT*	
PROCEDIMIENTO DE EVALUACIÓN DE LA CONFORMIDAD *CONFORMITY ASSESSMENT PROCEDURE*	**Módulo // *Module:* B** **EXAMEN UE DE TIPO / *EU TYPE EXAMINATION***
IDENTIFICACIÓN DEL EPI (NÚMERO DE TIPO) *IDENTIFICATION OF THE PPE (TYPE NUMBER)*	**Ref.: CLAB16** **FILTERING HALF MASK**
NIVEL O NIVELES DE RENDIMIENTO O LA CLASE DE PROTECCIÓN DEL EPI / *PERFORMANCE LEVEL OR PROTECTION CLASS OF THE PPE*	**FFP2 NR** 折叠FFP2 证书
NORMAS ARMONIZADAS / *HARMONISED STANDARDS*	EN 149:2001 + A1:2009 Dispositivos de protección respiratoria. Medias máscaras filtrantes de protección contra partículas. Requisitos, ensayos, marcado. *EN 149:2001 + A1:2009 Respiratory protective devices. Filtering half masks to protect against particles. Requirements, testing, marking*
FECHA DE EMISIÓN / *ISSUE DATE*	**08/01/2021**
VALIDEZ HASTA / *VALIDITY UNTIL*	**08/01/2026**

El presente certificado se mantendrá vigente durante 5 años siempre que el producto descrito no sea modificado y cumpla los requisitos esenciales de salud y seguridad establecidos en el Reglamento (UE) 2016/425. Para asegurar dicho cumplimiento, este certificado deberá ir acompañado de la documentación correspondiente a la Evaluación de Conformidad con el tipo según módulo C2, D (realizada por un Organismo Notificado, según frecuencia establecida).

This certificate will remain valid for 5 years as long as the indicated pn KONOOO® *t and fulfils the essential requirements of health and safety established in (EU) Regulation 2016/425. To ensure such compliance, the certificate must be accompanied by the documentation corresponding to the Conformity Assessment to type according to C2, D(carried out by a Notified Body according, to the established frequency).*

LGAI Technological Center, S.A.
Xavier Ruiz Peña
Managing Director, Product Conformity B.U

Este documento carece de validez sin su anexo técnico, cuyo número coincide con el del certificado.
This document is not valid without its technical annex, whose number coincides with the number of certificate.

Puede comprobarse la validez de este certificado en nuestra página web / *You can check the validity of this certificate on our website:*
www.appluslaboratories.com/certified_products